



# OL-CP Series


Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_

CPSM series LED Canopy Light is designed for outdoor lighting applications requiring bright, white light, energy savings and robust performance. Led Canopy Lights provide powerful lighting for outdoor applications. Led Canopy Light Fixtures outperform and outlast their metal halide (MH) counterparts, providing a brighter and more consistent light. Canopy Lights provide low-cost, high-powered flood illumination, and are more durable and long-lived alternatives to traditional halogen. Canopy Fixture are in a variety of colors, sizes, and wattages to suit your commercial lighting needs. This LED canopy light is available in 40W models with delivered lumens of 6,000. This LED canopy light is designed for easy installation and low maintenance. The low & Ultrathin profile canopy light is used in areas where you are trying to save on space without compromising on powerful illumination. It can be used in parking garages, gas station and more.

40W



## DIMENSION:(mm/in)

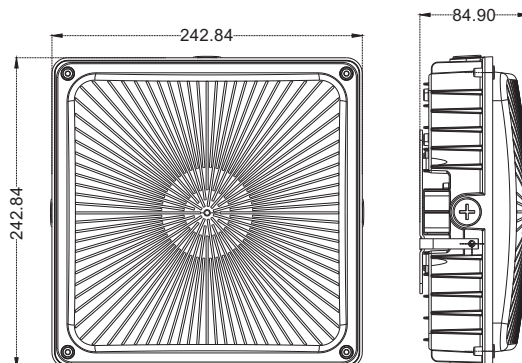

## OL-CP Series

### APPLICATIONS

- Parking garages
- Walkways
- Gas station
- Exhibition hall
- Outdoor storage areas
- Low-medium bay universally
- Soffits
- Warehouse

### FEATURES

- ETL/cETL listed for wet locations, IP65 rated
- 120 lumens per watt
- 100-277V universal voltage
- 0-10V dimming optional
- Photo control available
- Low-profile appearance with shock proof polycarbonate lens



Warehouse



Gas station



Building facades




Parking garages

### CONSTRUCTION

- A dark bronze die-cast aluminum housing
- Shatterproof polycarbonate lens
- Commercial grade one-for-one replacement for ceiling-mount fixtures
- The weatherproof light includes a rubber gasket to seal out moisture
- High light transmittance pc cover, high efficient SMD LED chips.

### PRODUCT DETAILS



**40W**



# OL-CP Series



## TECHNICAL SPECIFICATION

- Input Voltage : 100-277VAC
- Driver Type : UL Approved Flicker-free
- Luminous Efficacy : up to 120lm/w
- Colour Rendering Index : > 80Ra
- LED Type : LM80 SMD3030
- Operating : Temperature:-30°C up to 50°C  
(-22°F up to 122°F)
- Color Temperature : 3000K/4000K/5000K
- Material : Polycarbonate Body & Diffuser
- Ingress Protection : IP65
- Impact Rating : IK08
- Rated Life : 50,000 hours
- Warranty : 5 years

Produce Code	OL-CP-40W-50K
Power Consumption(W)	40W
Lumens Delivered (lm)	4800lm
Efficacy (lm/W)	120lm/w
Beam Angle	120°
CRI	70
Color Temperature	3000K/4000K/5000K
Power Factor	>0.9
Housing	Die-cast aluminum body. PC cover diffuse
Input Voltage	100-277VAC
Installation	Surface mounted
Operating Temperature	-30°C up to 50°C (-22°F up to 122°F)
Certification	ETL/cETL
Warranty	5 years

## LUMINAIRE PHOTOMETRIC

### Luminous Intensity Distribution Diagram:

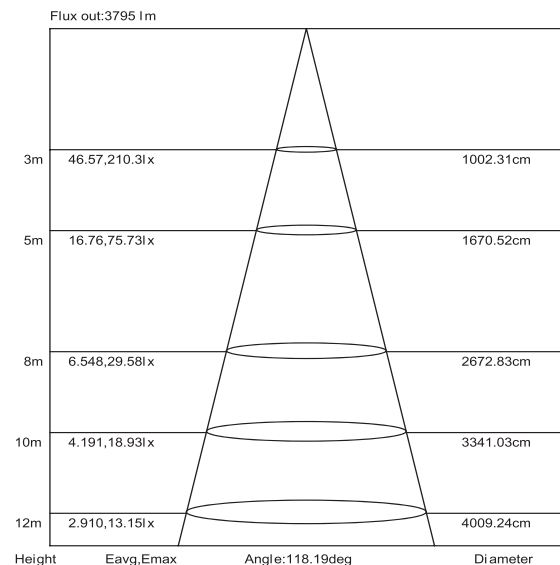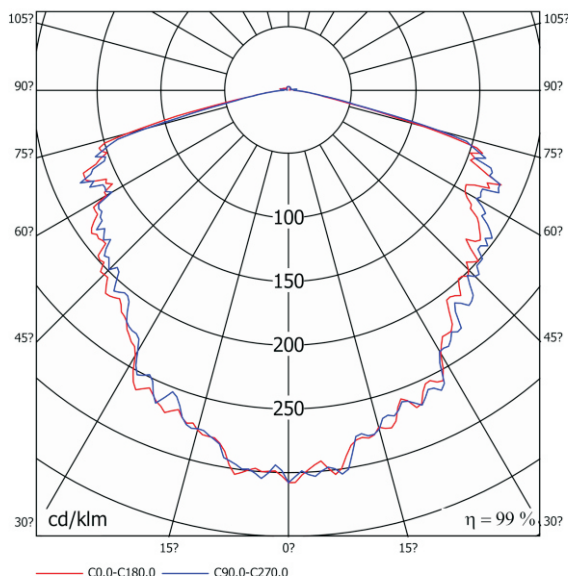


# OL-CP Series

**shatterproof polycarbonate lens**

The high lumen output and low profile design make the LED canopy light ideal for building exteriors and parking garages.

High light transmittance pc cover, high efficient SMD LED chips.

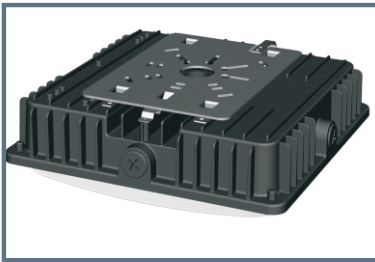**Install multiple ways**

Match J-BOX installation or hanging installation

## PACKAGING

Model No.	Qty (pcs)	L*W*H (CM)	NW. (kgs)	G.W. (kgs)	Meas. (CBM)
			Per CTN	Per CTN	Per CTN
OL-CP-40W-50K	4	40*27*27.5CM	9.2	11.2	0.03