




EM Series

Project: _____ Part #: _____
Type: _____

Injection-molded, 5VA flame-retardant and high-impact thermoplastic housing, this LED emergency light has high-impact resistance. High performance chrome-plated metallized reflector and plastic lens for optimal light distribution. 360 degree rotation, the flexibility of the light direction allows you to point the lights at almost a 90 degree angle.



DIMENSION:(mm/in)

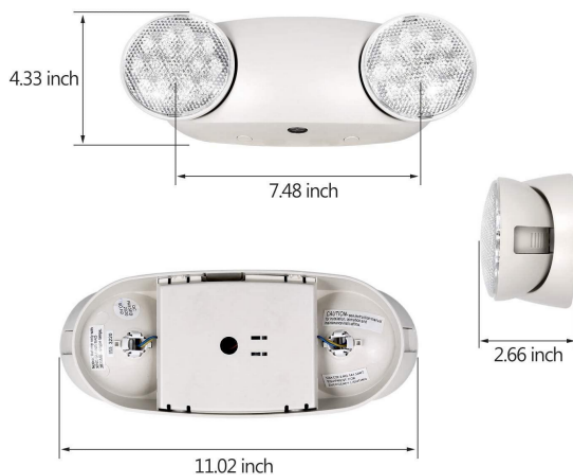

EM Series

CONSTRUCTION

High impact resistant.
Internal back-up battery provides 90 minutes operation during a power outage.
Use long-lasting, efficient ultra bright white LEDs.
Mounting: wall mounted.
5 years warranty.
Applications: stairways, hallways, doorways, etc.

APPLICATIONS



ACCESSORIES

☐ Screw and Cap



☐ Fixing Hardware





EM Series

TECHNICAL SPECIFICATION

Produce Code	DM-EM110
Power Consumption(W)	4W
Lumens Delivered (lm)	400lm
Efficacy (lm/W)	105lm/w
CRI	>70
Input Voltage	100-277VAC
Power Factor	0.9
Housing	PC
Installation	Recessed outlet box or wall surface
Operating Temperature	-30°C up to 50°C (-22°F up to 122°F)
Certification	ETL/cETL

PACKAGING

Model No.	Qty	L*W(H)	N.W.(kgs)	G.W.(kgs)	Meas.(CBM)
	(pcs)	(CM)	Per CTN	Per CTN	Per CTN
DM-EM110	14	60*29*26CM	13.4	19.6	0.05