



# EM Series

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white finish. High performance chrome-plated metallized reflector and plastic lens for optimal light distribution. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours. Compact, low-profile design.



SUITABLE FOR  
**WET**  
LOCATIONS



## DIMENSION:(mm/in)

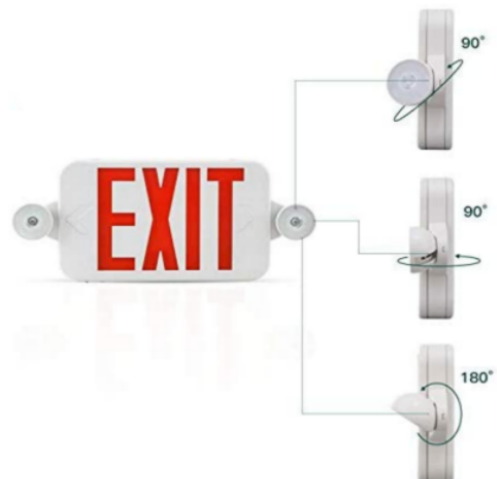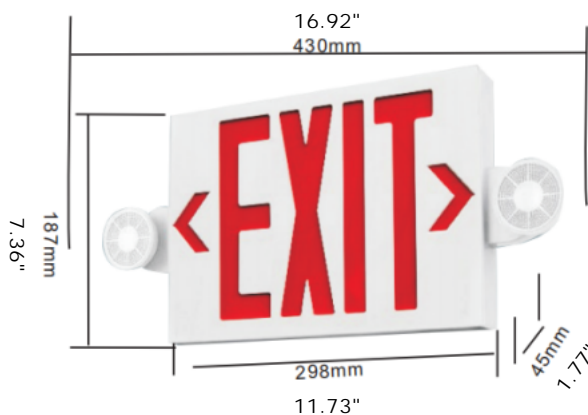

# EM Series

## ADVANTAGE

Unique all inclusive lamp, reflector and lens assembly.

High impact resistant.

Internal back-up battery provides 90 minutes operation during a power outage.


Long-lasting, energy efficient Red or Green LED EXIT sign illumination.

Mounting: top mounted or wall mounted

5 years warranty.

Applications: exit, hallways, doorways, etc.

## APPLICATIONS

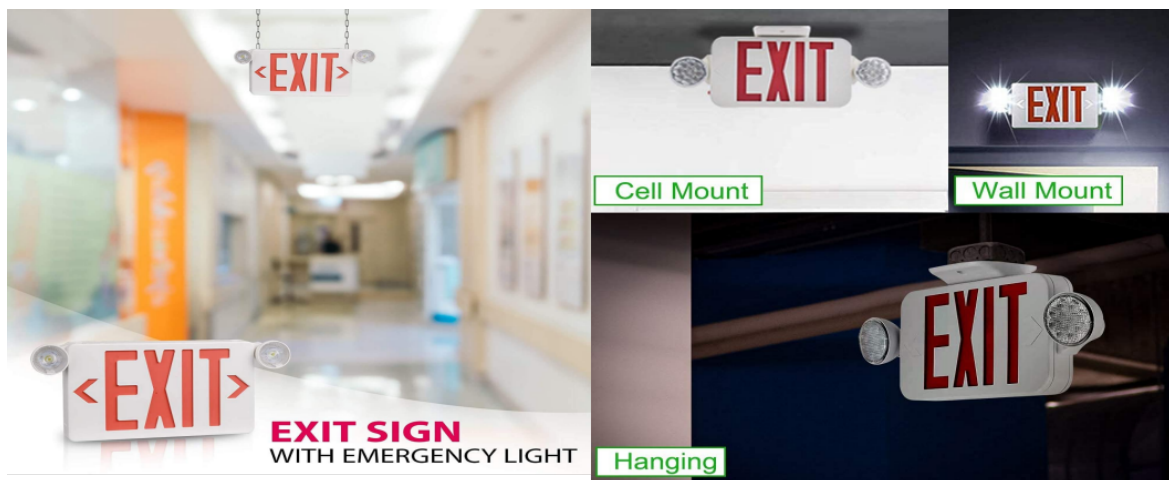

## ACCESSORIES

☐ Screw and Cap



☐ Fixing Hardware



☐ Canopy





# EM Series

## TECHNICAL SPECIFICATION

|                              |   |
|------------------------------|---|
| <b>Produce Code</b>          | DM-EM119                                |
| <b>Power Consumption(W)</b>  | 5W                                      |
| <b>Lumens Delivered (lm)</b> | 525lm                                   |
| <b>Efficacy (lm/W)</b>       | 105lm/w                                 |
| <b>CRI</b>                   | >70                                     |
| <b>Input Voltage</b>         | 100-277VAC                              |
| <b>Power Factor</b>          | 0.9                                     |
| <b>Housing</b>               | PC                                      |
| <b>Installation</b>          | Recessed outlet<br>box or wall surface  |
| <b>Operating Temperature</b> | -30°C up to 50°C<br>(-22°F up to 122°F) |
| <b>Certification</b>         | ETL/cETL                                |

## PACKAGING

| Model No. | Qty   | L*W(H)     | N.W.(LBs) | G.W.(LBs) | Meas.(CBM) |
|-----------|-------|------------|-----------|-----------|------------|
|           | (pcs) | (CM)       | Per CTN   | Per CTN   | Per CTN    |
| DM-EM119  | 14    | 45*39*40CM | 21.2      | 39.9      | 0.05       |