



CL14 Series

Project: _____ Part #: _____
Type: _____


LED DOUBLE RING FLUSHMOUNT has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact along with an acrylic lens provide many years of use. It is designed to operate on 120V circuits. With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! provides a 5-year limited warranty along with ETL and Energy Star certifications to guarantee top quality products and safety.



SUITABLE FOR
WET
LOCATIONS



DIMENSION:(mm/in)

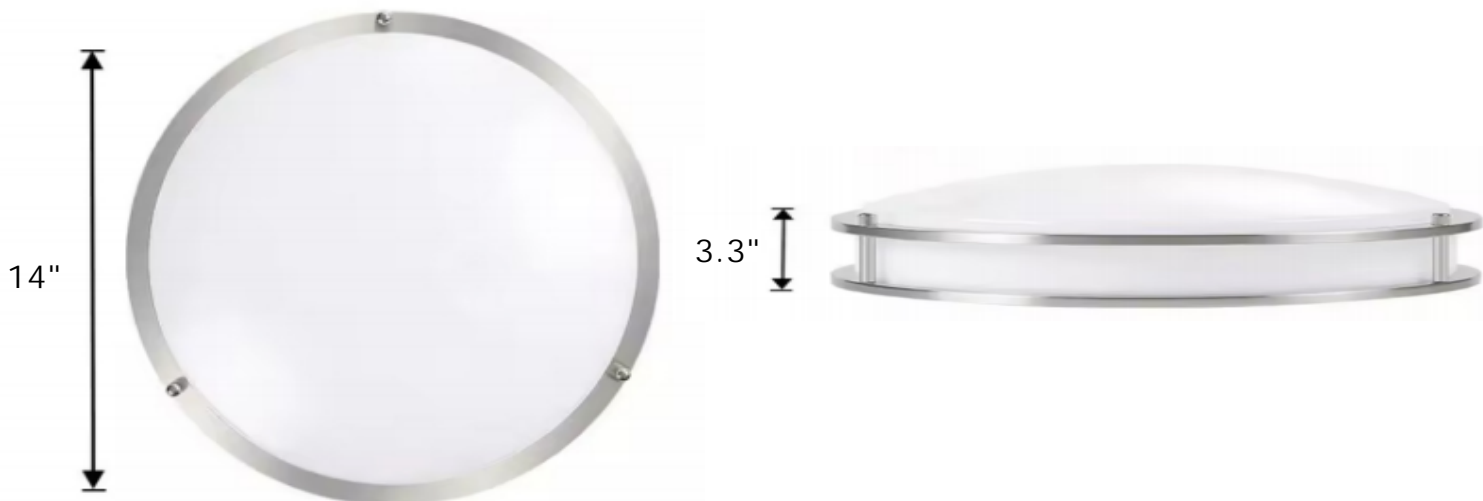

CL14 Series

ADVANTAGE

- Input Voltage: AC120V 60Hz
- Power Factor: PF>0.90
- Driver Type: Intergrated triac driver is dimmable with most regular dimmers.
- Operating: Temperature -20°C to 50°C
- Colour Temperature: Selectable 5CCT
- Material: Milky polycarbonate diffuser with nickel plated steel frame.
- Warranty: 5 years
- Certification: cETLus / Intertek 4005165

APPLICATIONS



TECHNICAL SPECIFICATION

	CL14-190-5CCT
Power Consumption(W)	25W
Color Temperature	3000K/3500K/4000K/5000K/6500K
Lumens Delivered (lm)	720lm
Efficacy (lm/W)	2125lm/w
CRI	>85
Input Voltage	120VAC
Power Factor	0.9
Housing	IR+PC
Installation	surface mount
Operating Temperature	-30°C up to 50°C (-22°F up to 122°F)
Certification	ETL/cETL



CL14 Series

PACKAGING

Model No.	Qty	L*W*H	N.W.(LBs)	G.W.(LBs)	Meas.(CBM)
	(pcs)	(INCH)	Per CTN	Per CTN	Per CTN
CL14-190-5CCT	6	25.78*15.3*15.3"	16.5	18.7	0.1