



DL Series

Project: _____ Part #: _____
Type: _____

EASY INSTALL- Each LED retrofit kit is designed for a quick install into any indoor/ outdoor 5" / 6" can housing. A complete LED recessed light with a screw in E26 base adapter and metal tabs for a flush to ceiling finish. Lower your electricity usage by 84% when you replace your 90 watt incandescent light bulbs with 14 watt LED recessed trim lights. Immediately cut down the cost of your recessed lighting by making the investment into energy saving LED flood lights.

DIMMABLE - Control the brightness of your 5/6" LED recessed light with it's smooth dimming feature that can be reduced from 100% to 10% lighting output. Be in control of your recess lights that will dim down to your preferred setting without flickering or issues, so you can enjoy a pleasant atmosphere every time. With a wet location rating, these LED recessed lights are ideal for new and old construction, remodels, sot, eaves, shower, and any indoor and outdoor location.





5/6" Dimmable



4" Dimmable



DIMENSION:(mm/in)

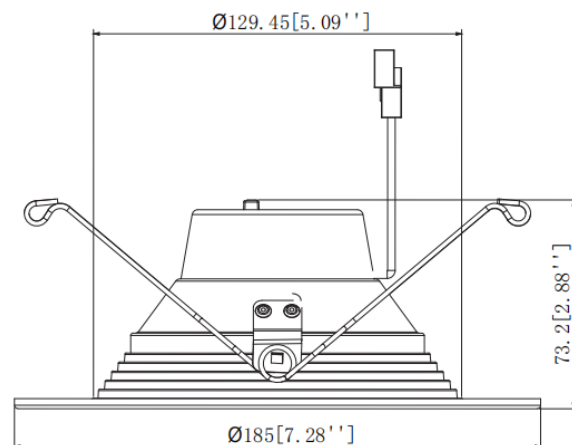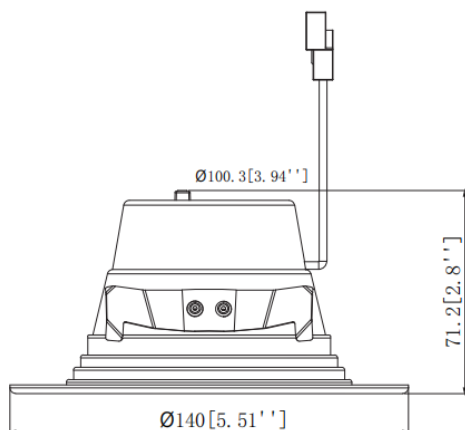



DL Series

FEATURES

- Replaces legacy CFL, HID or incandescent downlights
- Provides comfortable diffused light with no dark spots
- Dimmable to 10% with a wide array of dimmers
- Pre-wired with poke-in connectors for easy installation
- Clips for secure installation onto existing ceilings
- With LED light source, energy efficient and environment friendly

TECHNICAL SPECIFICATION


- Input Voltage: 120VAC/60Hz
- Power factor: >0.9 THD<15%
- Luminous Efficacy: up to 85lm/w
- Colour Rendering Index: 90RALED
- Type: High performance LM80 SMD LED
- Operating Temperature: -20°C up to 45°C (-4°F up to 113°F)
- Color Temperature: 2700K/3000K/3500K/4000K/5000K
- Material: Polycarbonate Diffuser With Iron
- Rated Life: 50,000 hours

COMPATIBLE DIMMER LIST

Lutron: TGCL-153PH, MACL-153M, DVCL-153P, CTCL-153P, MACL-153M

Leviton: IPL06-10, 6674-PO, 6672-1L

APPLICATIONS




Lounge



bathroom



kitchen



living room

TECHNICAL SPECIFICATION

Produce Code	DL4-462-5CCT	DL6-463-5CCT
Power Consumption(W)	9W	12W
Lumens Delivered (lm)	675lm	900lm
Efficacy (lm/W)	75lm/w	80lm/w
Beam Angle	90°	90°
CRI	90	90
Color Temperature	2700K/3000K/3500K/4000K/5000K	2700K/3000K/3500K/4000K/5000K
Power Factor	>0.9	>0.9
Housing	PC+Iron	PC+Iron
Input Voltage	120VA/60Hz	120VA/60Hz
Installation	Embedded installation	Embedded installation
Operating Temperature	-20°C up to 45°C	-20°C up to 45°C
Certification	ETL/cETL FCC	ETL/cETL FCC
Warranty	3 years	3 years



DL Series

PACKAGING

Model No.	Qty	L*W*H	N.W.(LBs)	G.W.(LBs)	Meas.(CBM)
	(pcs)	(INCH)	Per CTN	Per CTN	Per CTN
DL4-462-5CCT	40	23.81*12.2*16.9"	17.6	20.9	0.08
DL6-463-5CCT	30	23.62*15.74*16.9"	19.8	26.67	0.1