

# EM Series

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_


Injection-molded, 5VA flame-retardant and high impact thermoplastic housing, this led emergency lights have high-impact resistant. High performance chrome-plated metallized reflector and plastic lens for optimal light distribution. Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. Compact, low-profile design.



## DIMENSION:(mm/in)



### Ultra Slim LED Emergency Exit Sign Product Breakdown

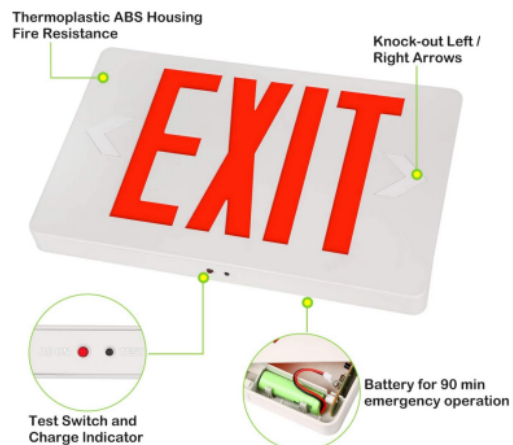

# EM Series

## ADVANTAGE

High impact resistant.  
Internal back-up battery provides 90 minutes operation during a power outage.  
Use long-lasting, efficient ultra bright white LEDs.  
Mounting: wall mounted.  
5 years warranty.  
Applications: stairways, hallways, doorways, etc.

## APPLICATIONS



## ACCESSORIES

☐ Screw and Cap



☐ Fixing Hardware



☐ Canopy





# EM Series

## TECHNICAL SPECIFICATION

<b>Produce Code</b>	DM-EM114
<b>Power Consumption(W)</b>	5W
<b>Lumens Delivered (lm)</b>	525lm
<b>Efficacy (lm/W)</b>	105lm/w
<b>CRI</b>	>70
<b>Input Voltage</b>	100-277VAC
<b>Power Factor</b>	0.9
<b>Housing</b>	PC
<b>Installation</b>	Recessed outlet box or wall surface
<b>Operating Temperature</b>	-30°C up to 50°C (-22°F up to 122°F)
<b>Certification</b>	ETL/cETL

## PACKAGING

Model No.	Qty	L*W(H)	N.W.(LBs)	G.W.(LBs)	Meas.(CBM)
	(pcs)	(CM)	Per CTN	Per CTN	Per CTN
DM-EM114	14	45*32*40CM	29.48	43.12	0.05