




WRL Series

Project: _____ Part #: _____
Type: _____

Outstanding thermal solution to support better heat dissipation.
PMMA Lens to maximize light output and distribution.
High-density LEDs for uniform light output.
Wattage and CCT switchable through dip-switches.
Suspend the wraparound light by using suspension wire.
Can be surface mounted to walls and ceilings.
perfect for garages, office, workshops, utility rooms, storage rooms, equipment rooms, etc.



DIMENSION:(mm/in)

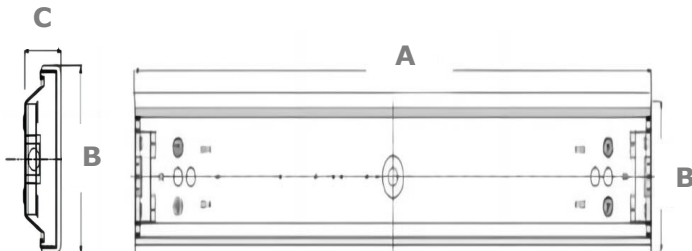

SIZE	A (inch)	B (inch)	C (inch)
2ft	24.10"	7.09"	2.90"
4ft	47.71"	7.09"	2.90"
8ft	94.42"	7.09"	2.90"

WRL Series

ADVANTAGE

Wattage switchable : 15W/20W/24W (2ft)
30W/35W/40W (4ft) 64W/75W/90W (8ft)
CCT switchable: 3500K/4000K/5000K
0-10 V dimmable
CRI >80, PF >0.9
Input voltage: AC100-277V
Lumen: 135Lm/W
Long lifespan and reliable
DLC 5.1 premium & ETL certified

APPLICATIONS



ACCESSORIES

- ☐ Emergency Battery
- ☐ Suspension Mounted Kit



- ☐ Motion Sensor
- ☐ Remote Controller


Emergency Battery

- UL listed approved
- Emergency power: 20W
- Charging time: 24 hours
- Illumination time: 90 minutes

Motion Battery

- Output Dimming: 0-10V
- Max Installation height: 40ft
- Microwave, Bi-level sensor
- Detection Distance: 26ft

WRL Series



Remote Controller

- LCD screen display
- Memory and apply function
- Universal smart controller for dimmable sensor



Suspension Mounted Kit

- For suspending the Highbay
- Material: stainless steel



TECHNICAL SPECIFICATION

Produce Code	DM-WR2FT152024W	DM-WR4FT303540W	DM-WR8FT647590W
Power Consumption(W)	10W/15W/24W	24W/32W/40W	64W/75W/90W
Color Temperature	15W/20W/24W	30w/35w/40w	64W/75W/90W
Lumens Delivered (lm)	3120lm	6500lm	6500lm
Efficacy (lm/W)	130lm/w	130lm/w	130lm/w
CRI	>80	>80	>80
Input Voltage	100-277VAC	100-277VAC	100-277VAC
Power Factor	0.9	0.9	0.9
Housing	AL	AL	AL
Installation	surface mount ceiling mount	surface mount ceiling mount	surface mount ceiling mount
Operating Temperature	-30°C up to 50°C (-22°F up to 122°F)	-30°C up to 50°C (-22°F up to 122°F)	-30°C up to 50°C (-22°F up to 122°F)
Certification	ETL/cETL DLC	ETL/cETL DLC	ETL/cETL DLC

PHOTOMETRIC DATA

DM-WR4FT303540W

Minimum Watt	30W
Maximum Watt	40W
PF	0.973
CRI	84
THD	11.8%
Flux	5200Lm
Efficacy (AC)	130lm/W
Minimum CCT	3500K
Maximum CCT	5000K
Voltage Range	100-277V

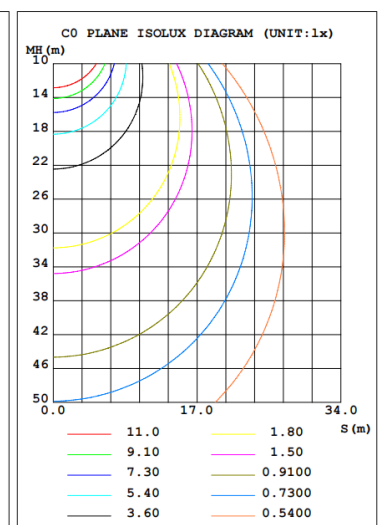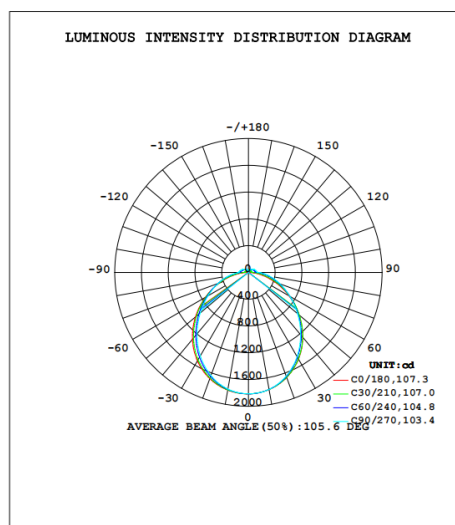



WRL Series

PACKAGING

Model No.	Qty	L*W*H	N.W.(LBs)	G.W.(LBs)	Meas.(CBM)
	(pcs)	(INCH)	Per CTN	Per CTN	Per CTN
4FT	4	49.21*8.27*12.99"	22.49	25.57	0.134