


LED SLIM PALEL LIGHT



Oncall LED

INSTALLATION INSTRUCTIONS

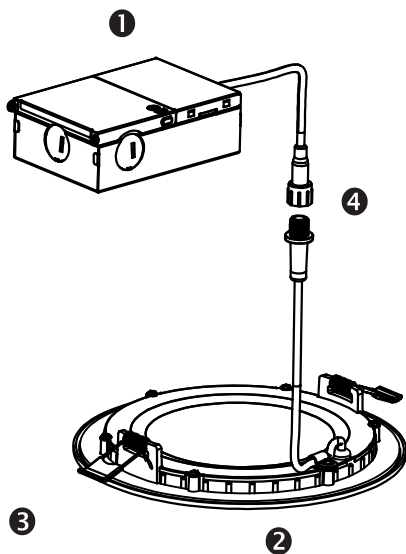

PARTS LIST

- 1 Junction Box
 - 2 Light Panel
 - 3 Spring Clips
 - 4 Connector
- CCT Dial Switch

COMPATIBLE DIMMER LIST

LEVITON	6672-ILT	IPL06	DSL06	6674	6674
EG	18021	10464			
LUTRON	DVCL-153P	MACL-153M			

MAINTENANCE

- Do not modify this fixture. Any modifications may render the product unsafe and void warranty.
- This product is suitable for Damp Location.

Limited Warranty

The warranty applies to the product from the original date of purchase for three(3) years against manufacturing defects. The owner must provide a copy of the original proof of purchase. The manufacturer's obligation under this warranty is limited to repairing or replacting the component. It is not related in any way to the cost of the connection, the installation of the replacement parts or cost of transport.

⚠ WARNING

Turn power OFF form electrical panel before installation or maintenance.

LED SLIM PALEL LIGHT




Oncall LED

INSTALLATION INSTRUCTIONS

1. Cut hole (refer to Cut-Out Dimensions Table for appropriate size) with a drywall saw. (Figure 1)

Fig.1




CUT-OUT DIMENSIONS

4" Round Diameter	4.255"
6" Round Diameter	6.225"
8" Round Diameter	8.225"


3. Feed the wires from the electrical source through the hole. Use the screw nuts to connect the wires according to the color, then close the junction box. (Figure 3)

Fig.3




5. Connecting the electrical box to the LED Downlight by twist the two parts of the connector in opposite directions. (Figure 5)

Fig.5

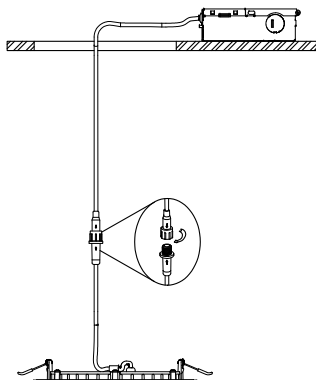


2. Separate the fixture body and junction box, open the junction box and remove one of the knock-out on the side. (Figure 2)

Fig.2



4. Place the electrical box through the cut-out hole in the ceiling and position it where desired. (Figure 4)

Fig.4

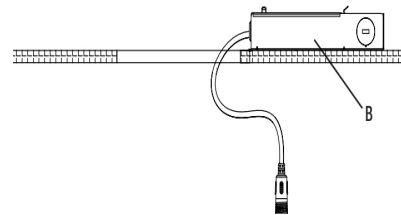

6. Flip both clips up and insert into the ceiling, gently push the LED downlight upward until the trim is flush with the ceiling surface. (Figure 6)

Fig.6

