



# CL Series

Project: \_\_\_\_\_ Part #: \_\_\_\_\_  
Type: \_\_\_\_\_



CL Series Dimmable Retrofit Kits are the perfect choice for new construction and retrofit opportunities when a sleek, integrated look is preferred. CL Series slim panel 9W or 15W has the following characteristics, 50W, 65W, 75W, 85W and 120W downlight, replacement options. Excellent color consistency (CRI), smooth, uniform dimming from 100% - 0.5%, long Life of 35,000 hours, easy installation with pigtail and spring clips.



## DIMENSION:(mm/in)

4 INCH

6 INCH

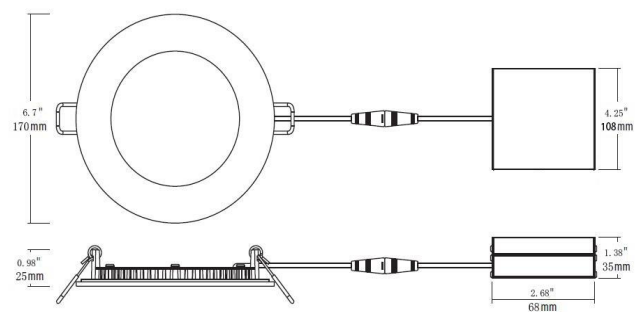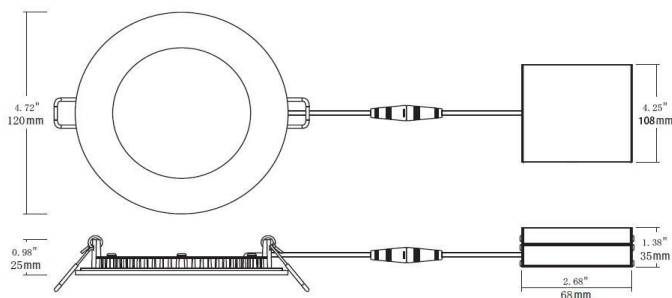

# CL Series

## ADVANTAGE

- Ultra thin body-3/4" thickness only
- 3CCT Selectable selectable
- IC Rated, isolated driver
- High brightness LEDs, CRI > 90, excellent color consistency - ETL Approved.
- Canless design, no housing needed, junction box included, easy and quick installation
- Smooth, Uniform Dimmable : 10%-100% dimming range



## APPLICATIONS



## DESCRIPTION

SlimLED4/6 3CCT is a 9/15 watt 4"/6" slim profile fixture for recess retrofit application, it is a fixture with selectable 3 CCT abilities, to promote on-site flexibility.

This fixture is compatible with industry standard TRIAC dimmers (Lutron, Legrand, Leviton)

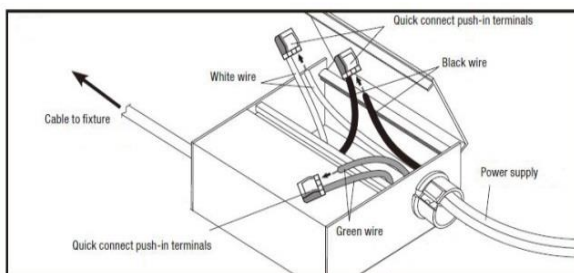



# CL Series

## TECHNICAL SPECIFICATION

Produce Code	CL-9X-ETL	CL-15X-ETL
<b>Power Consumption(W)</b>	9W	15W
<b>Color Temperature</b>	3000K/4000K/5000K	3000K/4000K/5000K
<b>Lumens Delivered (lm)</b>	720lm	1200lm
<b>Efficacy (lm/W)</b>	80lm/w	80lm/w
<b>CRI</b>	>85	>85
<b>Input Voltage</b>	90-130VAC	90-130VAC
<b>Power Factor</b>	0.9	0.9
<b>Housing</b>	AL+PC	AL+PC
<b>Installation</b>	Embedded installation	Embedded installation
<b>Operating Temperature</b>	-30°C up to 50°C (-22°F up to 122°F)	-30°C up to 50°C (-22°F up to 122°F)
<b>Certification</b>	ETL/cETL	ETL/cETL

## PACKAGING

Model No.	Qty	L*W*H	N.W.(LBs)	G.W.(LBs)	Meas.(CBM)
	(pcs)	(INCH)	Per CTN	Per CTN	Per CTN
CL-9X-ETL	6	15.55*5.5*5.9"	5.5	5	0.0012
CL-15X-ETL	6	17.8*5.5*5.9"	7	6	0.0014